


LS Standard Nozzle

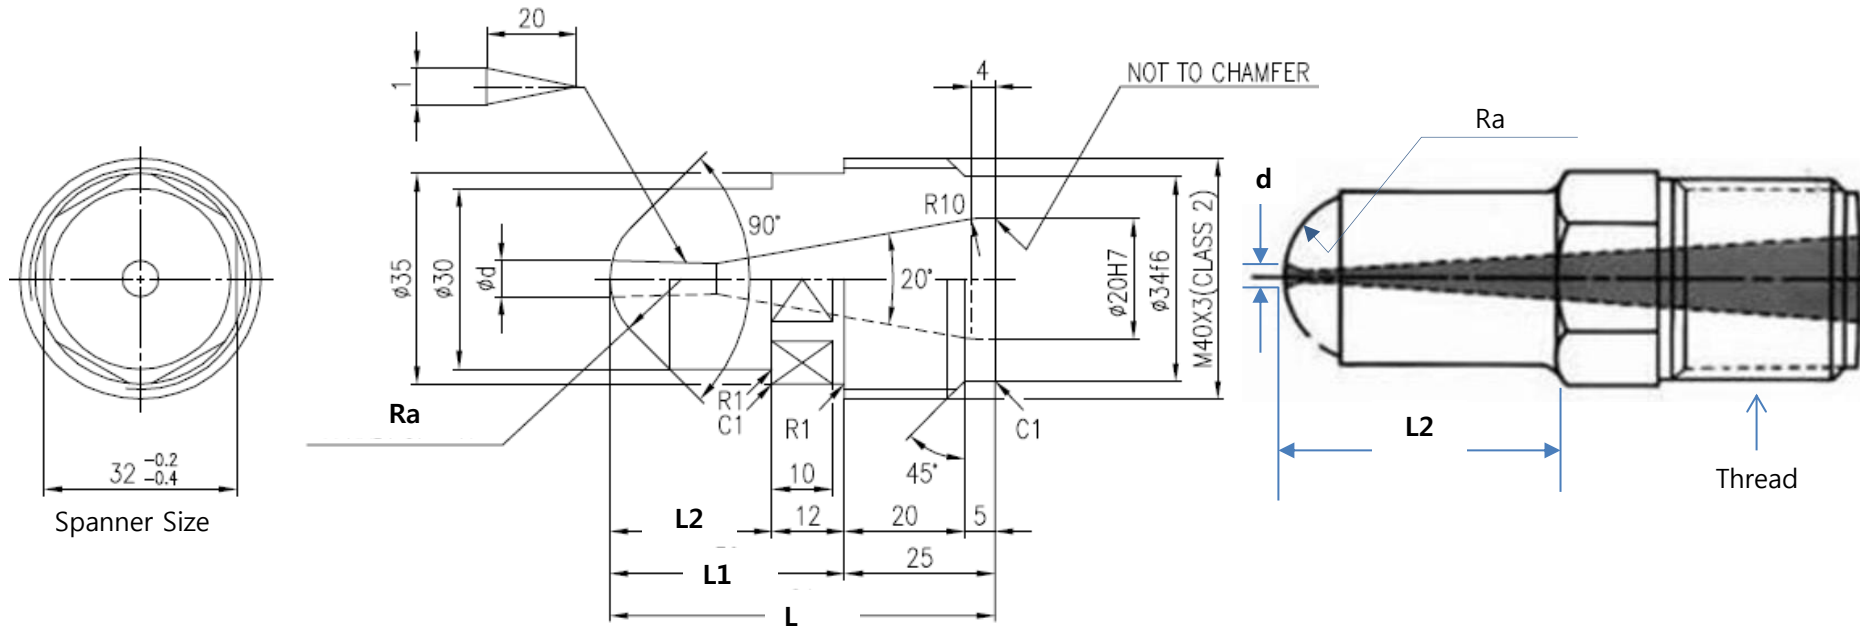

| IMM Model | d(ϕ) | L2 | Ra (Radius) | protrusion (돌출 량) | Thread (접속나사) | Spanner Size | Heater Size |
|--------------|-------------|--------|----------------|----------------------|------------------|-----------------|----------------|
| 80~130D | 3 | 47 | 19 | 60 | M33x2 | 32 | D30x20 |
| 170~350D | 4 | 47 | 19 | 60 | M33x2 | 32 | D30x20 |
| 450~1050M | 5 | 27 | 19 | 55 | M40x3 | 32 | - |
| WIZ500~1100 | 5 | 29 | 19 | 55 | M40x3 | 36 | - |
| WIZ1300~2000 | 6 | 27 | 19 | 55 | M40x3 | 36 | - |
| 1300~1800HM | 6 | 27 | 19 | 55 | M40x3 | 32 | - |
| 1800~2000S | 6 | 27 | 19 | 44 | M40x3 | 46 | - |
| 2500~3000M | 8 | 27 | 19 | 55 | M40x3 | 36 | - |
| 3000HM | 10 | 39(L1) | 19 | 65 | M45x3 | 41 | - |